

MTP® Ruggedised Pigtails

MTP® pigtails with ruggedized 3/5mm cable construction that allows long pigtail lengths enabling the splice management to be located outside the patch panels. They feature colour coded fibres for easy identification. They are compatible with parallel optics protocols.

Applications

- Multi-fibre MTP® connector
- Available in OS1/2, OM1, OM2, OM3, OM4 fibre grades
- 100% Factory terminated and tested
- MPO/MTP interface reduces front panel adaptor space
- Reduced installation time
- Ruggedized cable construction with 250µm fibres
- Next generation networks proof
- Option for LSZH, OFNP, or OFNR buffer
- Colour coded fibre per IEC 60304 MPO/MTP interface

Features

- Multifibre MTP® connector interface
- Factory terminated and tested
- MTP® interface reduces front panel adaptor space
- Increased speed of installation
- Ruggedized pigtails allow for splicing to be done remotely from adaptor patch panel
- Next generation networks proof
- OS1/2, OM1, OM2, OM3, OM4 fibre grades available
- LSZH, OFNP, OFNR buffer
- Fibres are color coded as per IEC 60304 MTP® interface
- Ruggedized 5/3mm Micro Cable pigtail construction with 250µm fibres in 3mm tube

Specifications

ELEMENT	CHARACTERISTIC
Fibre	OS1/OS2, G.657A1, OM1, OM2, OM3, OM4 (IEC 60793)
MTP® Termination	MTP® 12 Fibre Ferrules US Conec, Boot Colour: Black, Body Sleeve Colour: MM (Beige), MM Elite (Aqua), SM (Green), SM Elite (Yellow)
Cable Diameter	12 Core Double Jacket MicroCable Max OD 12 Core 4.5 ± 0.3mm, 12 Core Single Jacket MicroCable Max OD 12 Core 2.9 ± 0.1mm
Cable Tensile Strength	Double Jacket MicroCable (12 Core) (Short/Long) 400N/150N, Single Jacket Micro Cable (12 Core) (Short/Long) 200N/60N
Cable Strength Member	Aramid
Storage Temperature	-40 ~ +70°C
Installation Temperature	-5 ~ +50°C
Operating Temperature	-20 ~ +60°C

Connector Performance

CONNECTOR MATING	IL AVERAGE	IL MAX	RETURN LOSS
MTP® Elite (MM)	0.10dB	0.35dB	N/A
MTP® (MM)	0.20dB	0.60dB	N/A
MTP® Elite (SM)	0.10dB	0.35dB	>60dB
MTP® (SM)	0.25dB	0.75dB	>60dB


Cable Performance

FIBRETYPE (ISO/IEC 11801)	OS1/OS2	OM1	OM2	OM3	OM4
Attenuation Coefficient [dB/km]	≤ 0.38 Max (1310nm) ≤ 0.25 Max (1550nm) ≤ 0.34 Typ (1310nm) ≤ 0.19 Typ (1550nm)	≤ 3.5 Max (850nm) ≤ 1.5 Max (1300nm) ≤ 2.9 Typ (850nm) ≤ 1.2 Typ (1300nm)	≤ 3.5 Max (850nm) ≤ 1.5 Max (1300nm) ≤ 2.7 Typ (850nm) ≤ 0.9 Typ (1300nm)	≤ 3.5 Max (850nm) ≤ 1.5 Max (1300nm) ≤ 2.7 Typ (850nm) ≤ 0.9 Typ (1300nm)	≤ 3.5 Max (850nm) ≤ 1.5 Max (1300nm) ≤ 2.7 Typ (850nm) ≤ 0.9 Typ (1300nm)
Minimum Bandwidth: Overfilled Launch [Mhz-km]	N/A	≥ 200 (850nm) ≥ 500 (1300nm)	≥ 500 (850nm) ≥ 500 (1300nm)	≥ 1500 (850nm) ≥ 500 (1300nm)	≥ 3500 (850nm) ≥ 500 (1300nm)
Minimum Bandwidth: Laser Effective Modal Bandwidth [Mhz-km]	N/A	N/A	N/A	≥ 2000 (850nm)	≥ 4700 (850nm)

Standards Compliance

- TIA/EIA-568-C.3 and ISO/IEC 11801
- IEC-61754-7 & EIA/TIA-604-5
- IEC 60332
- Compliant to Directive 2002/95/EC (RoHS) and REACH SvHC
- IEC-60793



Ordering Information

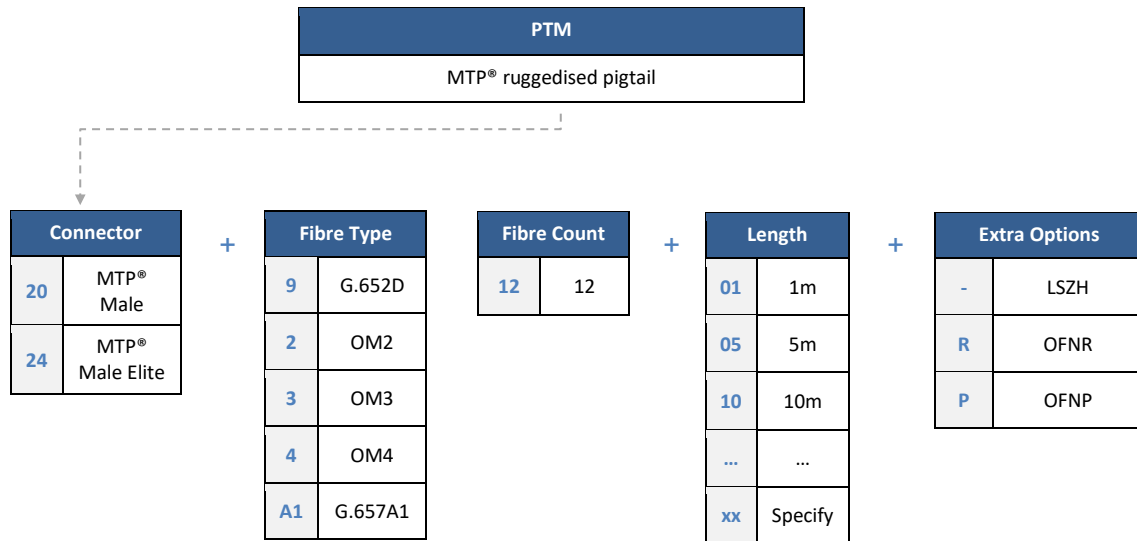

Example:

PTM-20312-05– MTP® male ruggedised pigtail OM3 LSZH 3m

Technical Drawing

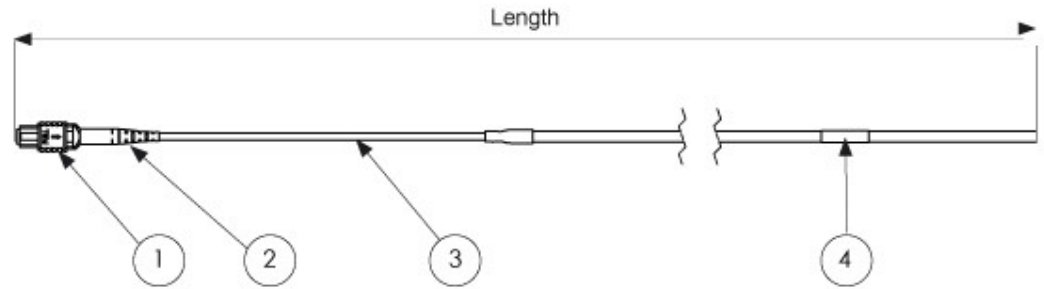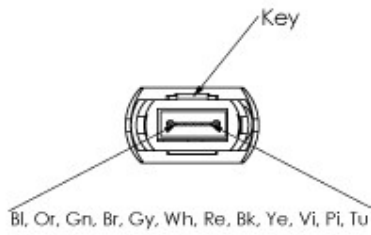

1. MTP® Connector
2. MTP® Connector Boot
3. Fibre Optic Cable
4. Serial Number Label