

## OM3 Multimode Pigtails

OM3 multimode pigtails are used for the termination of optical cables via fusion or mechanical splicing. They consist of a high quality 900um LSZH cable terminated with an optimized connector for low insertion loss and low back reflection. They fully conform to IEC, TIA/EIA and Telcordia standards.

### Applications

- Termination of optical networks via fusion or mechanical splicing
- Data centres, Premises and Telecommunication applications
- Patch panels, wall boxes, ODFs and splice cassettes

### Features

- Available with SC, LC, ST or FC connectors
- Available with 900µm tight buffered or easy strip white coloured cable
- Low smoke zero halogen (LSZH) buffer
- Multimode Fibre compliant with ITU-G651.1, TIA/EIA 492AAAC
- REACH, RoHS and SvHC compliant
- Available in standard 12 colors as per IEC 60304 and in standard and blister packing

## Specifications

### Connector Specification

OPTICAL PERFORMANCE	MULTIMODE	CONFORMANCE
IL Max/Master (Acceptance)	0.25dB	IEC61300-3-4
Ave/Master	0.15dB	IEC 61300-3-4
Ave/Random	0.20dB	IEC 61300-3-34

Note: Return Loss > 28dB based on sample data using method IEC 61300-3-6


### Cable Specification

CHARACTERISTICS	UNITS	SIMPLEX
Crush	N/100mm	500
Operating Temperature	°C	-20 to +60
Stripping Length – Easy Strip	m	1.5 minimum
Stripping Length – Tight Buffer	mm	30 nominal
Nominal Buffer Diameter	µm	900 +/- 50
Max Tensile Load	N	6

### Fiber Specification

CHARACTERISTICS	
Attenuation (dB/km)	2.8 @ 850nm / 0.8 @ 1310nm
Bandwidth OFL (MHz x km)	1500 @ 850nm / 500 @ 1310nm
Bandwidth EMBC (MHz x km)	2000 @ 850nm

## Ordering Information

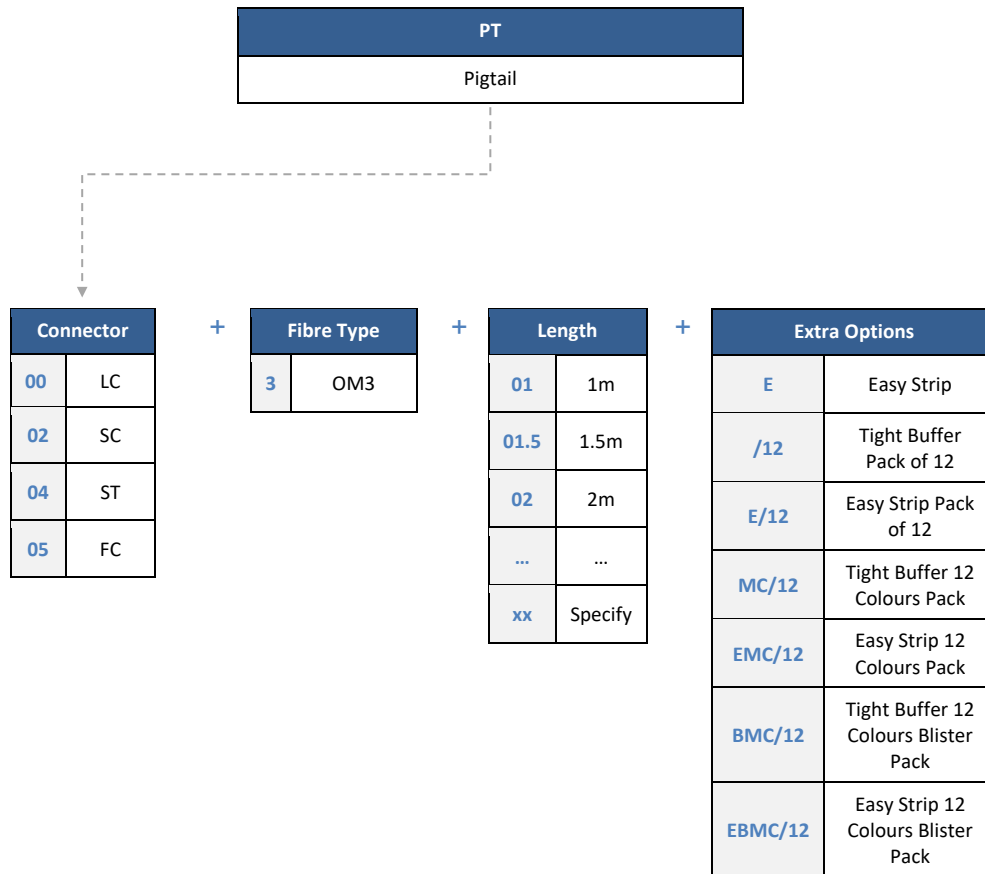

### Examples:

**PT-00-3-01** – Pigtail LC/UPC Multimode OM3 1m

**PT-02-3-02-E** – Pigtail SC/UPC Multimode OM3 Easy Strip 2m

**PT-05-3-01-EMC/12** – Pigtail FC/UPC Multimode OM3 Easy Strip 1m 12 Colours Pack